



# Wedge Anchors

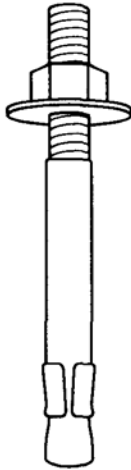


Size	Thread Length	Hole Size	Min. Imbed.	Ship Wgt / 100
1/4 X 1-3/4	3/4	1/4	1-1/8	3.000
1/4 x 2-1/4	1	1/4	1-1/8	3.620
1/4 x 3-1/4	1	1/4	1-1/8	5.020
3/8 x 2-1/4	1-1/8	3/8	1-5/8	8.080
3/8 x 2-3/4	1-1/8	3/8	1-5/8	9.980
3/8 x 3	1-1/8	3/8	1-5/8	11.00
3/8 x 3-3/4	1-1/4	3/8	1-5/8	12.76
3/8 x 5	1-1/4	3/8	1-5/8	16.24
1/2 x 2-3/4	1-1/2	1/2	2-1/4	18.82
1/2 x 3-3/4	1-1/2	1/2	2-1/4	23.58
1/2 x 4-1/4	1-1/2	1/2	2-1/4	26.86
1/2 x 5-1/2	1-1/2	1/2	2-1/4	33.63
1/2 x 7	1-1/2	1/2	2-1/4	43.33
5/8 x 3-1/2	1-5/8	5/8	2-3/4	41.00
5/8 x 4-1/2	1-9/16	5/8	2-3/4	44.00
5/8 x 5	1-9/16	5/8	2-3/4	52.00
5/8 x 6	1-9/16	5/8	2-3/4	59.95
3/4 x 4-1/4	2-3/16	3/4	3-1/4	63.35
3/4 x 4-3/4	2-3/16	3/4	3-1/4	68.80
3/4 x 5-1/2	2-3/16	3/4	3-1/4	76.70

# Hollow Wall Anchors




Size	A	B	C	D	E	F	G	Max. Exp.	Screw Lgth.	Ship Wt. Per 100
	Screw	Body	Overall	Sleeve	Collar	Expansion	Nut			
1/8 x 5/16 XShort	6-32 (1/8)	1/4	25/32	1/8	1/2	31/64	5/32	43/64	1	1.00
1/8 x 5/16 Short	6-32 (1/8)	1/4	1-9/32	23/64	1/2	5/8	17/64	11/16	1-7/16	1.25
1/8 x 5/16 Long	6-32 (1/8)	1/4	1-23/32	51/64	1/2	5/8	17/64	11/16	1-59/64	1.75
1/4 x 1/2 Short	1/4-20 (1/4)	3/8	1-13/16	3/8	11/16	1-3/16	9/32	1-1/8	2-1/4	5.50
1/4 x 1/2 Long	1/4-20 (1/4)	3/8	2-5/16	7/8	11/16	1-3/16	9/32	1-1/8	2-1/2	6.75

# Hammer Drive Anchors



Size Diam. (Exclude Nail)	Outside Diam. & Drill Req.	Working Load Lbs.	Ship Wt. Per 100
10 x 7/8	3/16	60	1.00
1/4 x 3/4	1/4	150	1.25
1/4 x 1	1/4	200	2.00
1/4 x 1-1/4	1/4	250	2.75
1/4 x 1-1/2	1/4	300	3.00
1/4 x 2	1/4	400	3.06

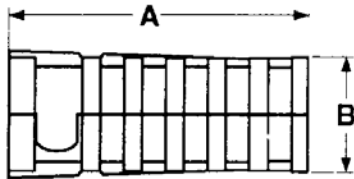

# Lag Screw Shields

Size	Diam. Of Lag Screw w/Which Shield Is Used	A	B	Ship Wght. Per 100
		Length Of Shield	Outside Diam. & Drill Req.	
1/4 Short	1/4	1	1/2	3.00
1/4 Long	1/4	1-1/2	1/2	5.00
5/16 Short	5/16	1-1/4	1/2	3.00
5/16 Long	5/16	1-3/4	1/2	5.00
3/8 Short	3/8	1-3/4	5/8	7.00
3/8 Long	3/8	2-7/16	5/8	9.50
1/2 Short	1/2	2	3/4	10.50
1/2 Long	1/2	3	3/4	14.00