
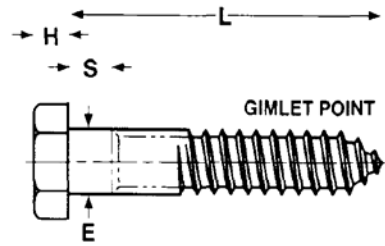


Lag Screws

Hex Head



Basic Product Diameter	Threads per Inch	E		F			G		H			S	
		Body or Shoulder Dia.		Width Across Flats			Hex Lag Screws						Shoulder Length
							Width Across Corners		Head Height				
		Max.	Min.	Basic	Max.	Min.	Max.	Min.	Basic	Max.	Min.	Min.	
1/4	0.2500	10	0.260	0.237	7/16	0.438	0.425	0.505	0.484	11/64	0.188	0.150	0.094
5/16	0.3125	9	0.324	0.298	1/2	0.500	0.484	0.577	0.552	7/32	0.235	0.195	0.125
3/8	0.3750	7	0.388	0.360	9/16	0.562	0.544	0.650	0.620	1/4	0.268	0.226	0.125
7/16	0.4375	7	0.452	0.421	5/8	0.625	0.603	0.722	0.687	19/64	0.316	0.272	0.156
1/2	0.5000	6	0.515	0.482	3/4	0.750	0.725	0.866	0.826	11/32	0.364	0.302	0.156
5/8	0.6250	5	0.642	0.605	15/16	0.938	0.906	1.083	1.033	27/64	0.444	0.378	0.312
3/4	0.7500	4-1/2	0.768	0.729	1-1/8	1.125	1.088	1.299	1.240	1/2	0.524	0.455	0.375